


# ME451: Control Systems

## Lecture 15 Time response of 2nd-order systems

Dr. Jongeun Choi  
Department of Mechanical Engineering  
Michigan State University

# Course roadmap

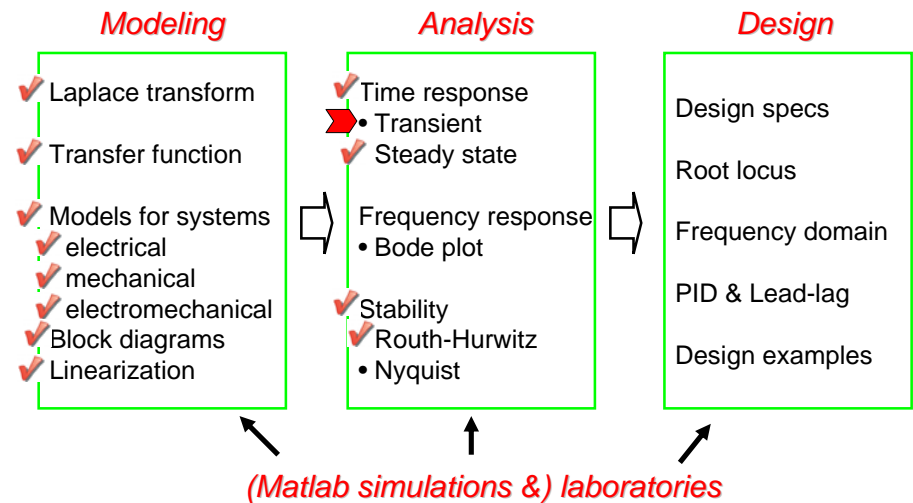


## Performance measures (review)

- Transient response (Today's lecture)
    - Peak value
    - Peak time
    - Percent overshoot
    - Delay time
    - Rise time
    - Settling time
  - Steady state response (Done)
    - Steady state error
- Next, we will connect these measures with s-domain.*


## Second-order systems

- A **standard form** of the second-order system
 
$$G(s) = \frac{\omega_n^2}{s^2 + 2\zeta\omega_n s + \omega_n^2} \quad \begin{cases} \zeta: \text{damping ratio} \\ \omega_n: \text{undamped natural frequency} \end{cases}$$
- DC motor position control example

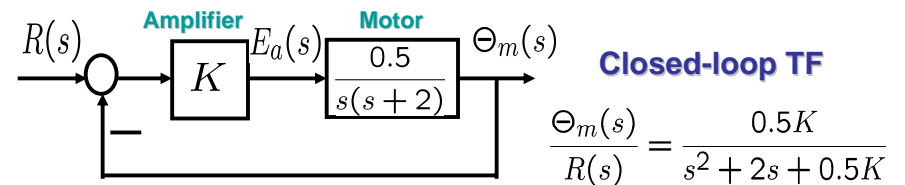

## Step response for 2nd-order system

- Input a **unit step function** to a 2nd-order system. What is the output?

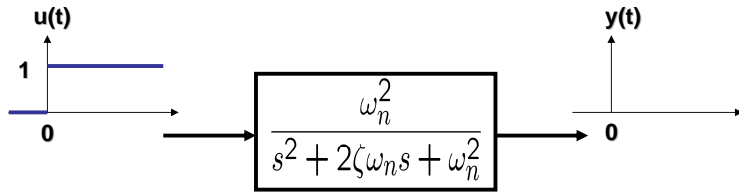


DC gain

$$G(0) = 1 \quad \rightarrow \quad \lim_{t \rightarrow \infty} y(t) = G(0) = 1 \text{ if } G \text{ is stable}$$

5

## Step response for 2nd-order system for various damping ratio

- Undamped  $\zeta = 0$
- Underdamped**  $0 < \zeta < 1$
- Critically damped  $\zeta = 1$
- Overdamped  $\zeta > 1$

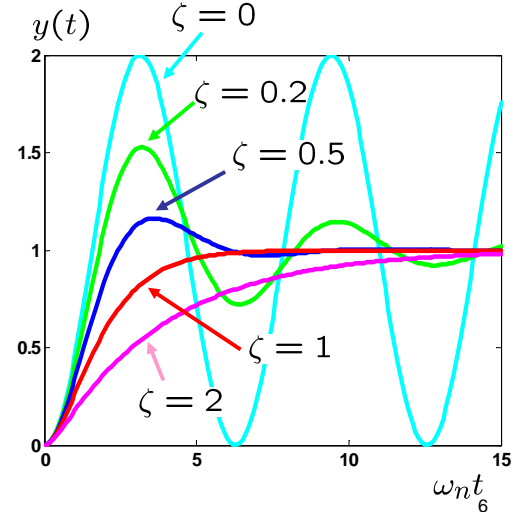

## Step response for 2nd-order system Underdamped case

- Math expression of  $y(t)$  for underdamped case

$$0 < \zeta < 1$$


$$Y(s) = \frac{\omega_n^2}{s^2 + 2\zeta\omega_n s + \omega_n^2} \cdot \frac{1}{s}$$

$$\mathcal{L}^{-1} \rightarrow y(t) = 1 - \frac{e^{-\zeta\omega_n t}}{\sqrt{1-\zeta^2}} \sin(\omega_d t + \cos^{-1} \zeta)$$

Damped natural frequency  $\rightarrow \omega_d = \omega_n \sqrt{1 - \zeta^2}$

7

## Peak value/time: Underdamped case

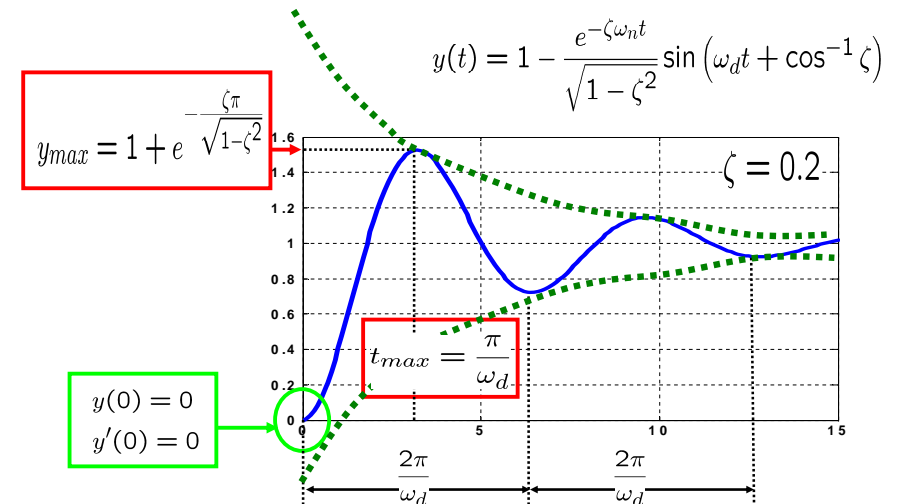

8

## Properties of 2nd-order system

$$G(s) = \frac{\omega_n^2}{s^2 + 2\zeta\omega_n s + \omega_n^2} \quad 0 < \zeta < 1$$

Peak time	$\frac{\pi}{\omega_d} = \frac{\pi}{\omega_n \sqrt{1-\zeta^2}}$
Peak value	$1 + e^{-\zeta\pi/\sqrt{1-\zeta^2}}$
Percent overshoot	$100e^{-\zeta\pi/\sqrt{1-\zeta^2}}$
Settling time	$\approx \frac{3}{\zeta\omega_n}$ or $\frac{4}{\zeta\omega_n}$ <b>(5%)</b> <b>(2%)</b>


9

## Some remarks

- Percent overshoot depends on  $\zeta$ , but NOT  $\omega_n$ .
- From 2nd-order transfer function, analytic expressions of delay & rise time are hard to obtain.
- Time constant is  $1/(\zeta\omega_n)$ , indicating convergence speed.
- For  $\zeta > 1$ , we cannot define peak time, peak value, percent overshoot.

10

## P.O. vs. damping ratio

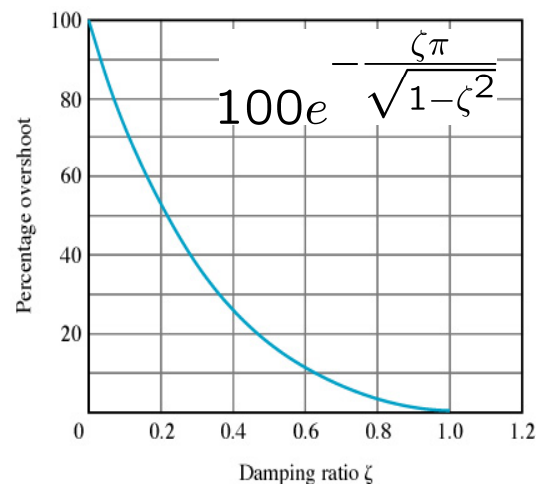

11

## Pole locations of G


- Poles ( $0 < \zeta < 1$ )

$$s = -\zeta\omega_n \pm j\omega_n \sqrt{1-\zeta^2}$$

$\omega_d$

- Damping ratio

$$\zeta = \cos \theta$$

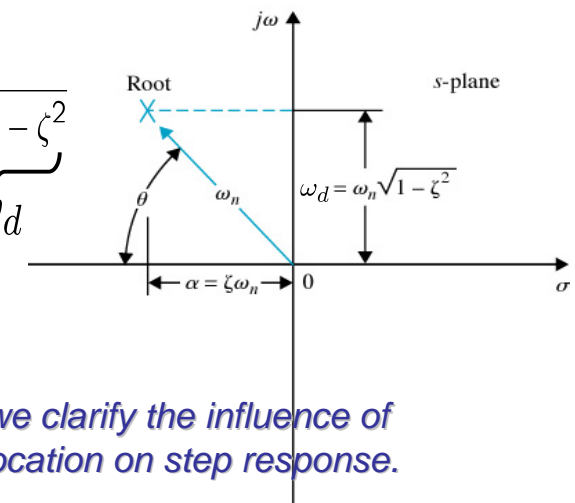


*Next, we clarify the influence of pole location on step response.*

12

## Influence of real part of poles


- Settling time  $t_s$  decreases.

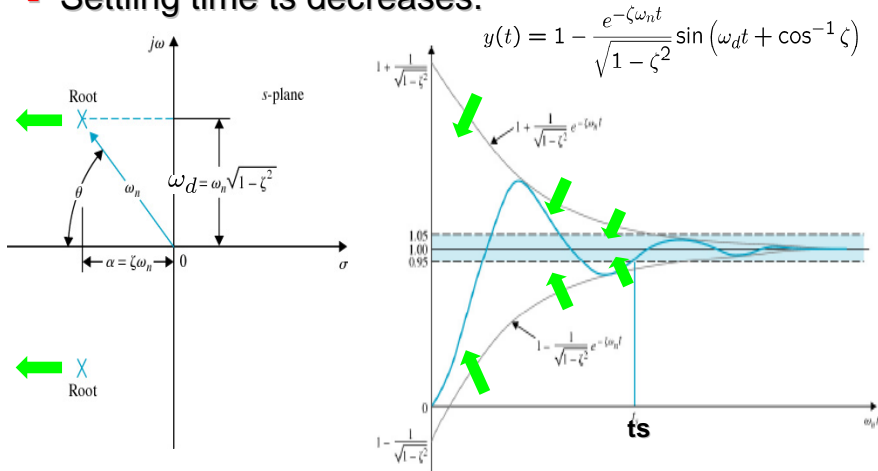

13

## Influence of imag. part of poles


- Oscillation frequency  $\omega_d$  increases.

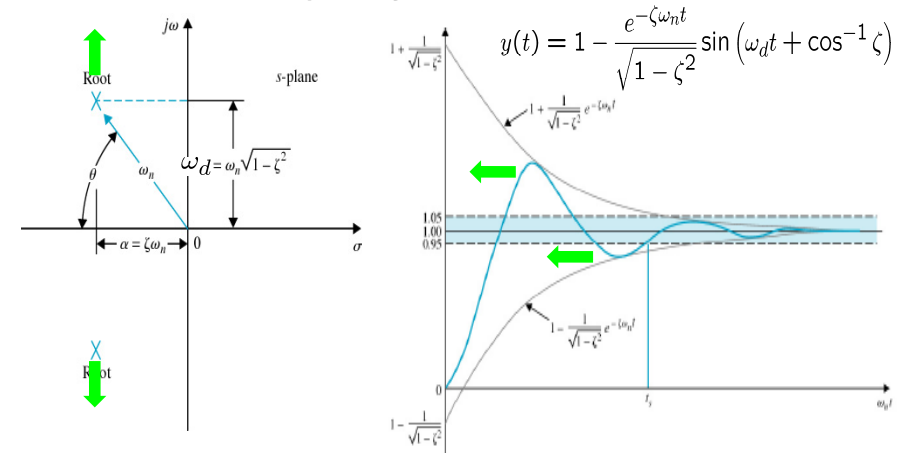

14

## Influence of angle of poles

- Over/under-shoot decreases.

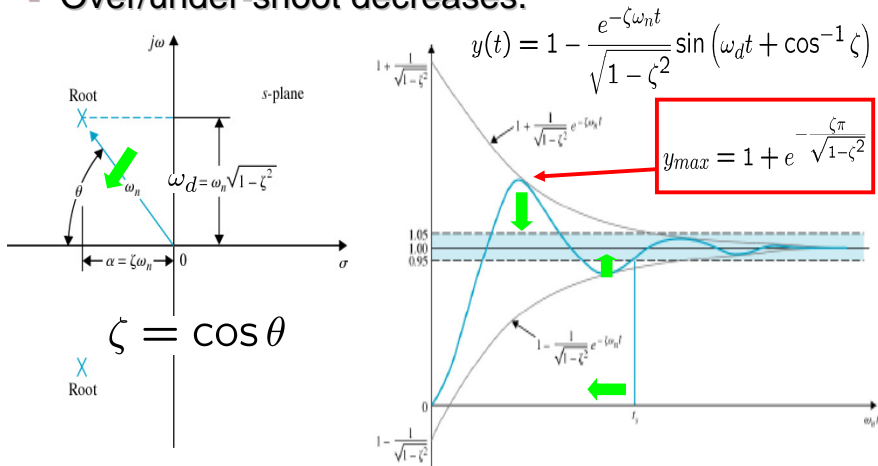


15

## An example

- Require 5% settling time  $t_s < t_{sm}$  (given):

$$t_s \approx \frac{3}{\zeta\omega_n} < t_{sm} \implies \zeta\omega_n > \frac{3}{t_{sm}}$$

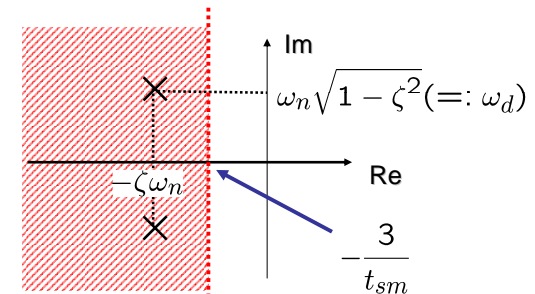

16


## An example (cont'd)

- Require  $PO < PO_m$  (given):

$$PO = 100e^{-\zeta\pi/\sqrt{1-\zeta^2}} < PO_m$$

$$= 100e^{-\pi/\tan\theta}$$

$$\theta < \theta_m$$

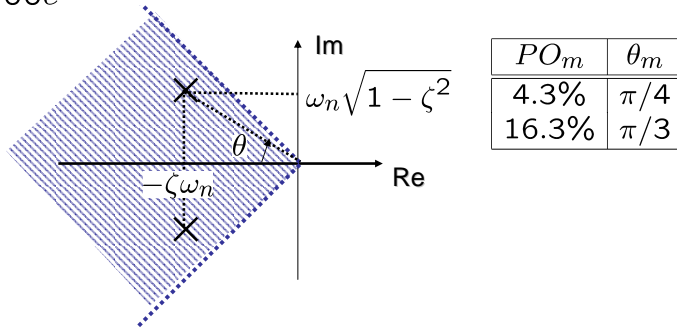


17

## An example (cont'd)

- Combination of two requirements

$$\zeta\omega_n > \frac{3}{t_{sm}} \quad \& \quad \theta < \theta_m$$

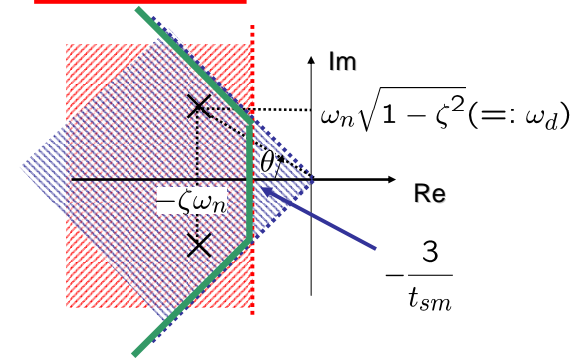

18

## Summary


- Transient response of 2nd-order system is characterized by
  - Damping ratio  $\zeta$  & undamped natural frequency  $\omega_n$
  - Pole locations
- Delay time and rise time are not so easy to characterize, and thus not covered in this course.
- For transient responses of high order systems, we need computer simulations.
- Next, Root locus

19

## Exercises

(Use a calculator if necessary.)

- Read Chapters 4.2 and 4.3.
- Solve Problem 4.11.
- 1. For the system below with  $\zeta=0.6$ ,  $\omega_n=5$  (rad/sec), obtain
  - Percent overshoot ?
  - 5% settling time ?

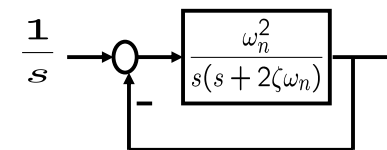

20

## Exercises

2. For the system below, design  $K_1$  and  $K_2$  s.t.

- Percent overshoot is at most 20%?
- Peak time is at most 1 sec.?
- With designed  $K_1$  and  $K_2$ , what is 5% settling time?

