


◀60X60X25mmSeries▶



Spot cooling, also suitable for small space requirements, laptops PC and notebook, etc.,

External Dimensions

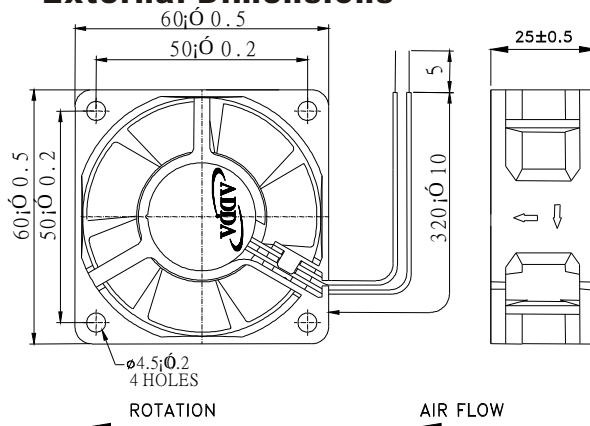


Frame: Plastic (UL:94v-0)
Impeller: Plastic (UL:94v-0)
Bearing: Hydro bearing
Lead wire: UL1007AWG24
OPERATING TEMP*: -10C~70C
VOLTAGE AVAILABLE: 12V
*: -10C~60C for fans with sleeve/ball combination bearings.

Specifications (Nominal)

*: Noise is measured at the distance of one (1) meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: ☐ = Ball ☐ = Sleeve ☐ = 1B1S ☐ = Hydro bearing					Weight (g)
							Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	Noise Level (dB/A)	
60X60X25	AQ0612HB-A70GL(T)	☐	12	0.23	2.76	4500	23.98	0.679	0.175	4.45	33.9	58
	AQ0612MB-A70GL(T)	☐	12	0.14	1.68	3500	17.95	0.508	0.106	2.69	27.1	
	AQ0612LB-A70GL(T)	☐	12	0.08	0.96	2500	12.65	0.358	0.054	1.38	18.1	

Specifications subject to change without notice.

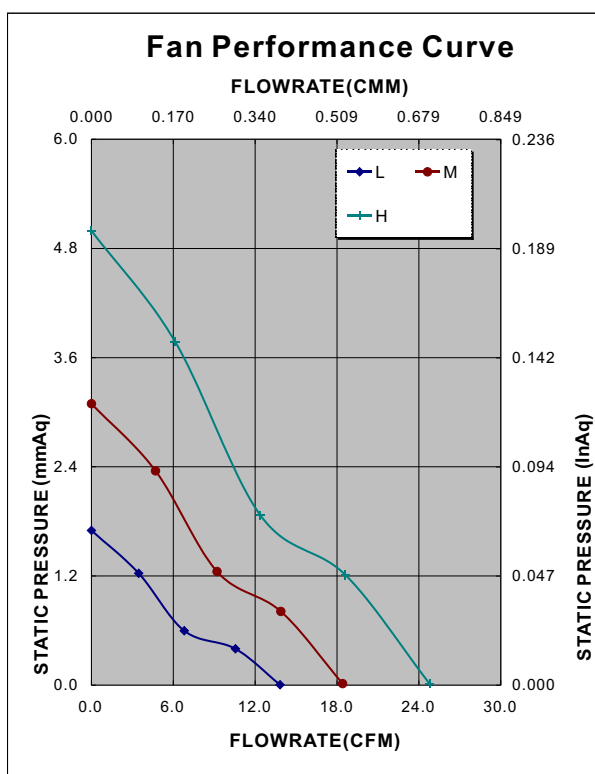

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

				✓	

